

XP
AUDIO



User guide

KRONOS 18A

www.xpaudiopro.com



18" Powered Professional Subwoofer

IMPORTANT INSTRUCTION

For your own safety please read this user manual carefully before installing the device.

SAFETY INTRODUCTION

- *If this speaker has been exposed to significant temperature changes due to storage or transportation changes, do not switch it on immediately. Leave the speaker switched off until it has reached room temperature.
- *It is essential that the device is earthed. A qualified person must carry out the electric connection.
- *Make sure that the available voltage is not higher than stated at the end of this manual.
- *Make sure the power cord is never crimped or damaged before and during use.
- *Only handle the power cord by plug. Never pull out the plug by tugging the power cord.
- *Turn off power before disconnecting electric.

CAUTION:

1. Please be aware that damages caused by user modification, misuse, physical abuse or any unusual activities will void the warranty.
2. Use this speaker at safe listening volumes.

GENERAL GUIDELINES


- *Operate this speaker only after reading this user manual.
- *Please use the original packaging if the device is to be transported.
- *For safety reasons, do not remove any speaker components or rear panel.





18" Powered Professional Subwoofer

The XP Audio **KRONOS 18A** is a powerful active sound system designed to deliver clarity, versatility, and reliable performance for all types of events. Equipped with a 18" woofer, it provides clear and dynamic sound across the entire frequency range. Its Class-D amplifier offers 1100W RMS output, ensuring punchy bass. Built with a durable enclosure and designed for easy transport, it delivers both power and mobility without compromise.

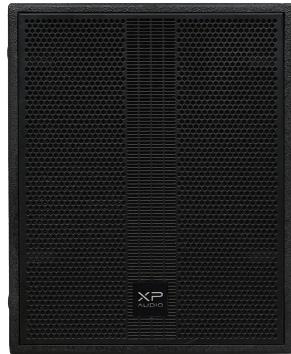

TECHNICAL SPECIFICATIONS


Model Name	KRONOS 18A
Power	1100w RMS/4400w PEAK
Amplifier	Class D
Woofer	18" 125oz 4.0" VC
Nominal Impedance	8 Ohm
Frequency Response	35Hz - 150Hz
Sensitivity	132dB Max SPL
Line input	2x XLR & 6.35 combo
Output	2x XLR
Cabinet Material	MDF
Weight	52.00kg
Dimensions (W×H×D)	76×61×77cm



18" Powered Professional Subwoofer

OPERATION GUIDE

1. Press for DSP (80 Hz, 100 Hz, 120 Hz, 140 Hz)
2. Phase adjustment: ON (REV180°) / OFF (Normal)
3. SUB LEVEL: Volume control
4. CH1: 3-pin XLR connector output
5. CH2: 3-pin XLR connector output
6. CH1: 3-pin XLR combo jack input
7. CH2: 3-pin XLR combo jack input
8. On/Off Switch
9. AC input socket

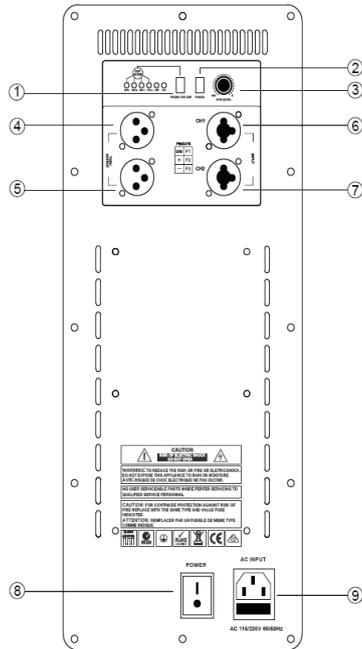



Sound efficiency redefined

Manufactured and distributed by:

XP AUDIO
www.xpaudiopro.com