


**XP**  
AUDIO

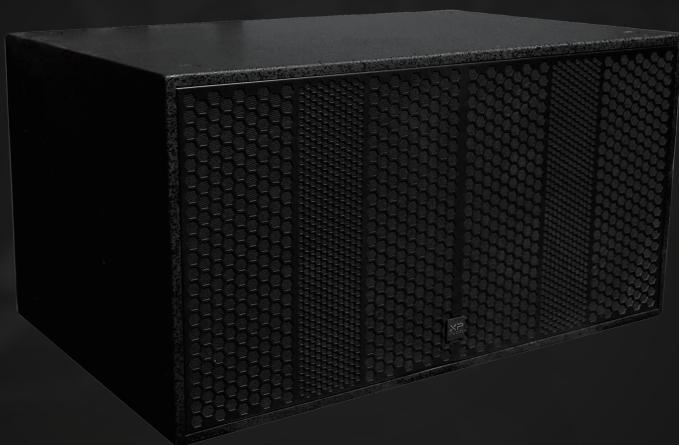

User guide

# **KRONOS 218A**

[www.xpaudiopro.com](http://www.xpaudiopro.com)



# Dual 18" Powered Professional Subwoofer

## IMPORTANT INSTRUCTION

For your own safety please read this user manual carefully before installing the device.

## SAFETY INTRODUCTION

\*If this speaker has been exposed to significant temperature changes due to storage or transportation changes, do not switch it on immediately. Leave the speaker switched off until it has reached room temperature.

\*It is essential that the device is earthed. A qualified person must carry out the electric connection.

\*Make sure that the available voltage is not higher than stated at the end of this manual.

\*Make sure the power cord is never crimped or damaged before and during use.

\*Only handle the power cord by plug. Never pull out the plug by tugging the power cord.

\*Turn off power before disconnecting electric.

## CAUTION:

1. Please be aware that damages caused by user modification, misuse, physical abuse or any unusual activities will void the warranty.

2. Use this speaker at safe listening volumes.

## GENERAL GUIDELINES

\*Operate this speaker only after reading this user manual.

\*Please use the original packaging if the device is to be transported.

\*For safety reasons, do not remove any speaker components or rear panel.



## Dual 18” Powered Professional Subwoofer



The XP Audio **KRONOS 218A** is a powerful active sound system designed to deliver clarity, versatility, and reliable performance for all of types of events. Equipped with dual 18” woofer, it provides clear and dynamic sound across the entire frequency range. Its **Class-D amplifier** offers 2200W RMS output, ensuring punchy bass. Built with a durable enclosure and designed for easy transport, it delivers both power and mobility without compromise.



### TECHNICAL SPECIFICATIONS

<b>Model Name</b>	KRONOS 218A
<b>Power</b>	2200w RMS/8800w PEAK
<b>Amplifier</b>	Class D
<b>Woofer</b>	18”   125oz   4.0” VC
<b>Nominal Impedance</b>	8 Ohm
<b>Frequency Response</b>	30Hz - 240Hz
<b>Sensitivity</b>	135dB Max SPL
<b>Line input</b>	2x XLR & 6.35 combo
<b>Output</b>	1x XLR
<b>Cabinet Material</b>	MDF
<b>Weight</b>	77.00kg
<b>Dimensions (W×H×D)</b>	127×75×60cm

# Dual 18" Powered Professional Subwoofer



## OPERATION GUIDE

1. DSP Set(USB Interface to Computer)

2. LCD Screen:  
DSP Main Menu: MODE / EQ/ SET UP/EXIT

3. Push for DSP Control


4.LINE / MIC Input Switch

5.MIX OUT: XLR

6.LINE/MIC Input Volumn  
Control A/B

7.Power Switch on/off

8.AC Input

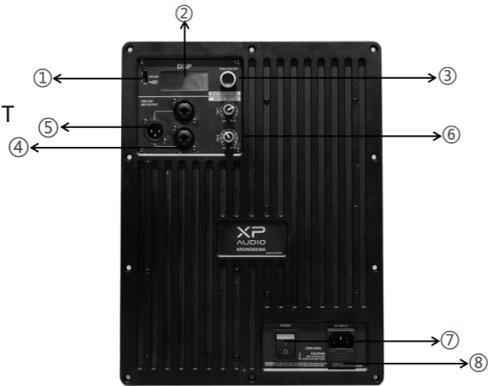



## Sound efficiency redefined

Manufactured and distributed by:

---

XP AUDIO  
[www.xpaudiopro.com](http://www.xpaudiopro.com)