

**XP**  
AUDIO



User guide  
**LAP615**

[www.xpaudiopro.com](http://www.xpaudiopro.com)



# 15" Powered Line Array With Bluetooth Audio PA System

## IMPORTANT INSTRUCTION

For your own safety please read this user manual carefully before installing the device.

## SAFETY INTRODUCTION

- \*If this speaker has been exposed to significant temperature changes due to storage or transportation changes, do not switch it on immediately. Leave the speaker switched off until it has reached room temperature.
- \*It is essential that the device is earthed. A qualified person must carry out the electric connection.
- \*Make sure that the available voltage is not higher than stated at the end of this manual.
- \*Make sure the power cord is never crimped or damaged before and during use.
- \*Only handle the power cord by plug. Never pull out the plug by tugging the power cord.
- \*Turn off power before disconnecting electric.

## CAUTION:

1. Please be aware that damages caused by user modification, misuse, physical abuse or any unusual activities will void the warranty.
2. Use this speaker at safe listening volumes.

## GENERAL GUIDELINES

- \*Operate this speaker only after reading this user manual.
- \*Please use the original packaging if the device is to be transported.
- \*For safety reasons, do not remove any speaker components or rear panel.





## 15" Powered Line Array With Bluetooth Audio PA System

The XP Audio **LAP615** is a powerful active sound system designed to deliver clarity, versatility, and reliable performance for all types of events. Equipped with a 15" woofer and a titanium compression driver, it provides clear and dynamic sound across the entire frequency range. Its Class-D amplifier offers 1000W RMS output, ensuring punchy bass and crisp highs, while Bluetooth connectivity adds flexibility for wireless streaming. Built with a durable enclosure and designed for easy transport, it delivers both power and mobility without compromise.



### TECHNICAL SPECIFICATIONS


<b>Model Name</b>	LAP615
<b>Power</b>	1000w RMS/4000w PEAK
<b>Amplifier</b>	Class D (DSP-103 4modes )
<b>Woofer</b>	15"   100oz   4.0" VC
<b>Driver</b>	2*6.5" ferrite MF+1*1.35" Polymer HF
<b>Nominal Impedance</b>	4 Ohm
<b>Frequency Response</b>	40Hz - 20KHz
<b>Sensitivity</b>	139dB Max SPL
<b>Input</b>	2 channels 6.35 & XR Jack combo
<b>Output</b>	1 channel XLR Output
<b>Media Player</b>	Bluetooth
<b>TWS</b>	Yes
<b>Cabinet Material</b>	Column: PP Hard Plasti Sub:Plywood



# 15" Powered Line Array With Bluetooth Audio PA System

## OPERATION GUIDE

1. DSP Set(USB Interface to Computer)
2. LCD Screen:  
DSP Main Menu: MODE / EQ/ SET UP/EXIT
3. Push for DSP Control
4. BLUETOOTH Switch ON/OFF
5. 2Ch XLR & 1/4" Combo Input
6. XLR Output
7. LINE/MIC Input Volumn Control A/B
8. LINE/MIC Input Selector Switch
9. AC Input
10. Speaker Out
11. Power Switch ON/OFF

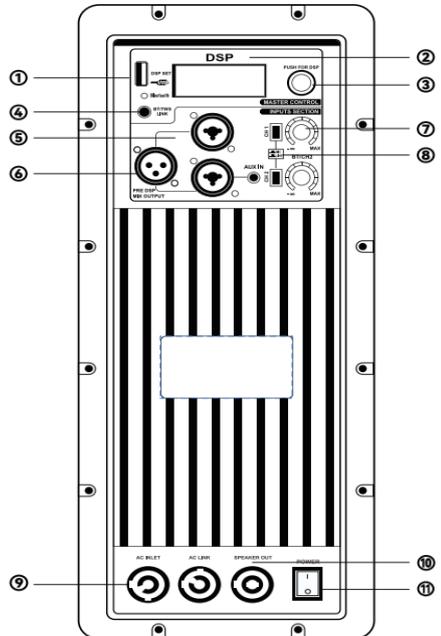

## Bluetooth Pairing

Once the MODE button is selected to BT, the Bluetooth pairing signal is sent waiting for a device to pair.

Only one subwoofer can pair with one Bluetooth device.

To connect two Subwoofers with Bluetooth, pair the first subwoofer to your device and connect an XLR connecting cable to the second subwoofer.



## Sound efficiency redefined

Manufactured and distributed by:

---

XP AUDIO  
[www.xpaudiopro.com](http://www.xpaudiopro.com)